



## PRODUCT INFORMATION

Evaporator Model	CTD2.55/302H-TCC			
Type	Direct Expansion (DX)			
Refrigerant	R404A			
Selection condition	SC1	SC2	SC3	SC4
	(Te = 0°C, RT= 10°C)	(Te = - 8 °C, RT= 0°C)	(Te = - 25 °C, RT= -18°C)	(Te = - 31 °C, RT= -25°C)
Cooling Capacity	7.3kW	4.82kW	2.84kW	2.29 kW
Surface Area	11.56 m <sup>2</sup>			

## TECHNICAL DETAILS

Fin Material	Aluminium
Fin Spacing	7 mm
Tube Material	Copper
Tube Volume	3.4 L
Casing	G.I Powder coated



## FAN & AIR FLOW

No. of fans	2
Fan Diameter	300 mm
Speed per fan	1380 rpm
Electric Power / fan	85 W
Air Flow	2800 m <sup>3</sup> /h
Air Throw	12 m

## DEFROSTING

Defrosting type	Electric
Coil Heater	1700W
Tray Heater	1000W

## DIMENSIONS

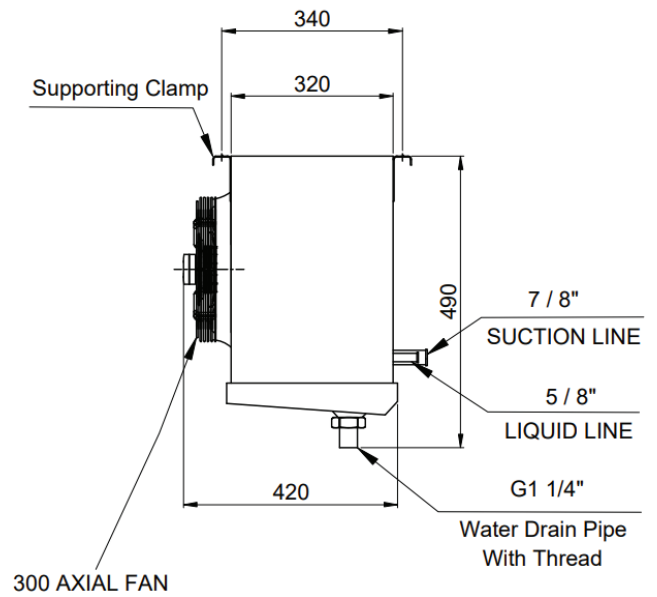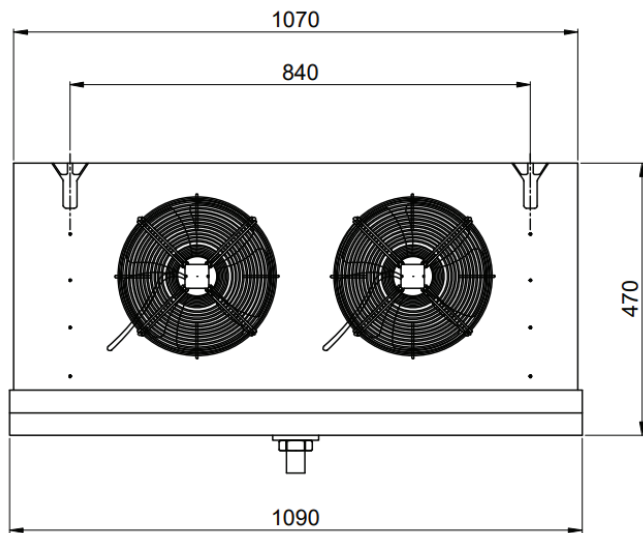

All Dimensions are in mm.

## NOTE:

- ❖ The actual air throw varies with product loading and several other factors.
- ❖ It is advised that the unit should not be used in a corrosive atmosphere.
- ❖ All data are subjected to change without prior notice.
- ❖ The fan and heater data could change slightly depending on the manufacturer's design and data changes.
- ❖ The technical and commercial information provided in this data sheet is a property of ColdTech Group, UAE  
info@coldtechgroup.com