



PRODUCT INFORMATION

Evaporator Model	:	CTD25/633H-HCC			
Type	:	Direct Expansion (DX)			
Refrigerant	:	R404A			
Selection condition	:	SC1	SC2	SC3	SC4
		(Te = 0°C, RT= 10°C)	(Te = - 8 °C, RT= 0°C)	(Te = - 25 °C, RT= -18°C)	(Te = - 31 °C, RT= -25°C)
Cooling Capacity	:	50.66kW	33.44kW	24.04kW	18.18kW
Surface Area	:	129.65m ²			

TECHNICAL DETAILS

Fin Material	:	Aluminium
Fin Spacing	:	7 mm
Tube Material	:	Copper
Tube Volume	:	38.46 L
Casing	:	G.I Powder coated



FAN & AIR FLOW

No. of fans	:	3
Fan Diameter	:	630 mm
Speed per fan	:	1360 rpm
Electric Power / fan	:	810 W
Air Flow	:	26000 m ³ /h
Air Throw	:	29 m

DEFROSTING

Defrosting type	:	Electric
Coil Heater	:	15000W
Tray Heater	:	2400W
Fan ring Heater	:	1200W

DIMENSIONS

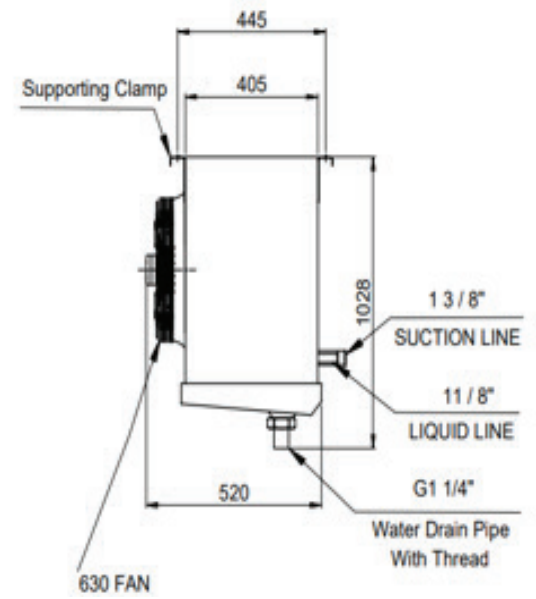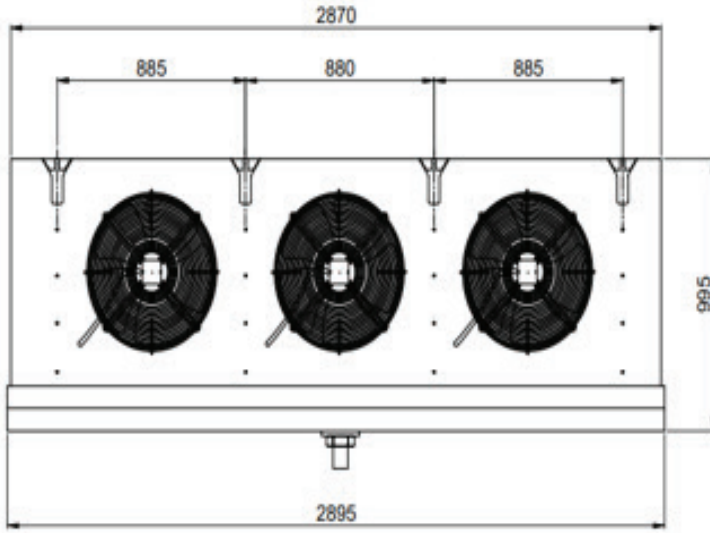

All Dimensions are in mm.

NOTE:

- ❖ The actual air throw varies with product loading and several other factors.
- ❖ It is advised that the unit should not be used in a corrosive atmosphere.
- ❖ All data are subjected to change without prior notice.
- ❖ The fan and heater data could change slightly depending on the manufacturer's design and data changes.
- ❖ The technical and commercial information provided in this data sheet is a property of ColdTech Group, UAE
info@coldtechgroup.com